

TRIPROOF60W15-5K-EM

QUICK FACTS

Input power	68W
Power Factor	≥0.9
IP Rating	65
Dimming	See Options
Lumen output	6200lm
CCT	5000K
CRI	80
Beam Angle	120°
Fascia Colour	White
Installation	Surface/Suspended Via Mounts
Warranty	5 years

PRODUCT SPECIFICATIONS


Supply Voltage	240-265V
Supply Frequency	50-60Hz
Cable	NO
Body	PC
Diffuser	PC
Driver	Integral
Weight	G.W : 3.6kgs N.W : 3.5kgs
Ambient Temp	0°C - 50°C
Avg. lifetime	≥50,000 hrs@ ta 25°C

Option:
DALI Dimming, 1-10V Dimming,
Emergency and Microwave
Sensor, Sensor, Emergency

PHOTO



PHOTOMETRIC DIAGRAM

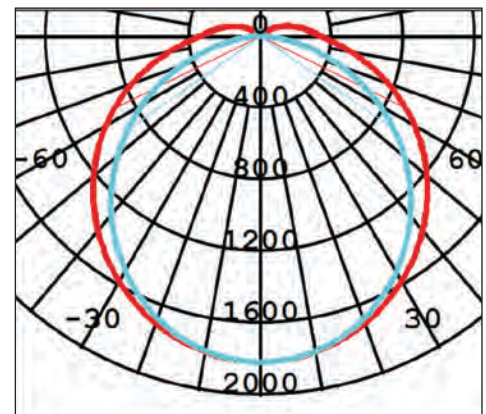


UNIT: cd

— C0/180 127.4deg

— C90/270 110.2deg

DIMENSIONS

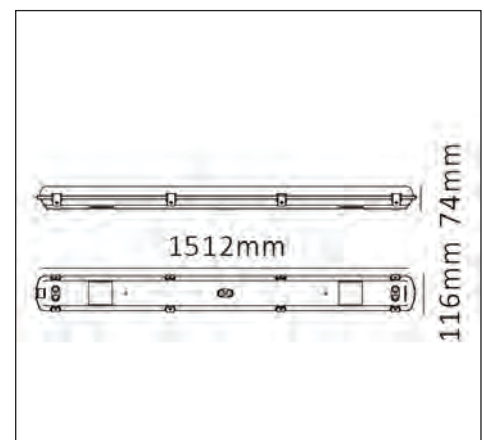

Subject to change without notice, errors and omission excepted. Always make sure to use the most recent release.

TRIPROOF60W15-5K-EM

PHOTO

EMERGENCY PACK SPECIFICATIONS

QUICK FACTS

Super thin design

Wide Output Voltage Range

Constant Current Driver

Safe no load operation

Overload and Short Circuit Protection

Overheating Protection

Simple Installation

SELV equivalent


Protection Class II

Pisuppression in accordance with

EMC550 15:2006+A1:2007+A2:2009



WIRING DIAGRAM

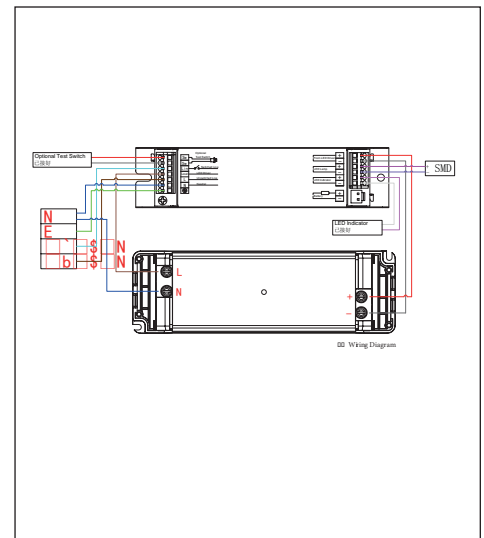

PRODUCT SPECIFICATIONS

Cut-Off Voltage **3.0V Max**

Max Charge Voltage **4.23V**

Max Charge Current **220mA**

Max Discharge Current **1000mA**

Max Battery Temperature **70°C**

Subject to change without notice, errors and omission excepted. Always make sure to use the most recent release.