

AOK-120WiL

LED Street & Parking Light, 240-280W HID Replacement



New



Black / white / silver / bronze color housing optional
1-10V / PWM / Resistance dimming optional

Specifications

Electrical Specifications



Model No.	AOK-120WiL
Nominal Wattage	120W
Nominal Voltage	90-305VAC, 50/60Hz
	24VDC
Maximum Current	AC 1.35A (max)
	DC 5A (max)
Power Factor (PF)	>0.95
Driver Efficiency	>93%

Photometric Specifications


Luminous Flux	+Lumen tolerance +/- 5%
	19,200-20,400lm
CRI	Ra>75
CCT	3000-6500K
Optional Beam Angle	60°/150° / 75°/160°

Mechanical Specifications


IP&IK Rating	IP66 & IK10
Lifetime	62000 hours - L70, @25°C
Heat Radiator	Anodized Aluminum
Lens	PC
Fixture Dimension	657*300*107mm
	25.9*11.8*4.2 inches
Net Weight	8.4kg
Carton Dimension	730*370*190mm
Gross Weight	9.5kg

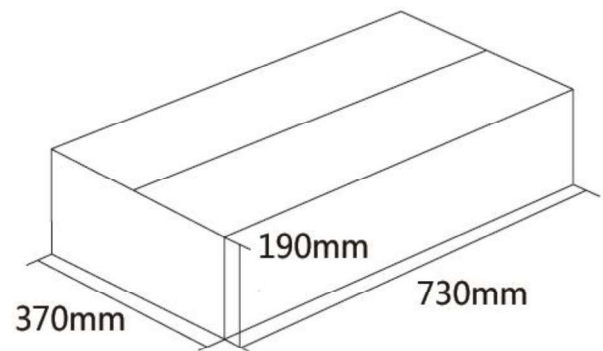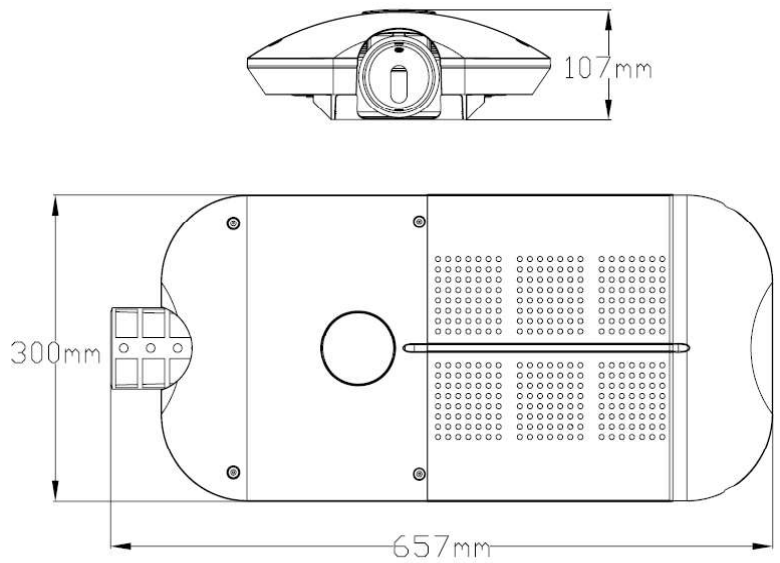


Optional converters for different applications




60mm to wall mount converter




2 in 1 converter




4 in 1 converter



Round to square converter



80-60mm converter



wall mount converter



60-40mm converter