


PURO 400 Multi

CL25W400R-MULTI-EM

SAP CODE: 2000113

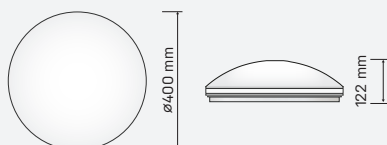


25W, indoor, Emergency,
Tritone three colour
temperature, LED oyster

An indoor oyster light with 3
switchable colour temperatures
and an emergency battery for
power failures.



Photometric
Diagram



Unit: cd
- C0/180 120.0deg
- C90/270 120.0deg

KEY INFORMATION

Lumen Output	1680 / 1840 / 1800lm
Input Power	25W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	67 / 74 / 72lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	14-42VDC
Power Factor	>0.9
LED Input Current (nominal)	600mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Steel
Optics	PMMA (acrylic)
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	1.2kg
Dimensions	Ø400x120mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2
Food Grade Approval	HACCP



Emergency Pack

Self charging Ni-Cd emergency battery

An emergency battery that ensures 3 hours of sufficient light during power failures.



QUICK FACTS

- Intelligent automatic recharging function
- Automatic output current adjustment
- Constant current mode
- 3 hour operation
- LED charge status display
- Deep discharge protection
- Test switch with self-test function

ELECTRICAL

Battery	Ni-Cd 3.6V 3.0Ah
EM LED Voltage	6-60V
Maximum Charge Current	200mA
Input Current	40mA
Maximum Battery Temperature	70°

Dimensions

