

AOK-40WiL

LED Street & Parking Light, 80-100W HID Replacement



New



Black / white / silver / bronze color housing optional
1-10V / PWM / Resistance dimming optional

Specifications

Electrical Specifications




Model No.	AOK-40WiL
Nominal Wattage	40W
Nominal Voltage	90-305VAC, 50/60Hz 12/24VDC
Maximum Current	AC 0.45A (max) DC 3.34A (max)
Power Factor (PF)	>0.95
Driver Efficiency	>90%

Photometric Specifications


Luminous Flux	+Lumen tolerance +/- 5% 6,400-6,800lm
CRI	Ra>75
CCT	3000-6500K
Optional Beam Angle	60°/150° / 75°/160°

Mechanical Specifications


IP&IK Rating	IP66 & IK10
Lifetime	62000 hours - L70, @25°C
Heat Radiator	Anodized Aluminum
Lens	PC
Fixture Dimension	495*300*107mm 19.5*11.8*4.2 inches
Net Weight	5.5kg
Carton Dimension	570*370*190mm
Gross Weight	6.7kg

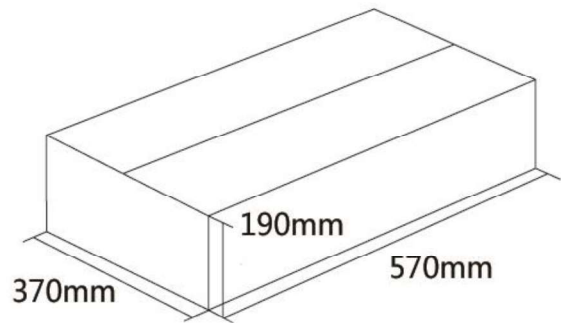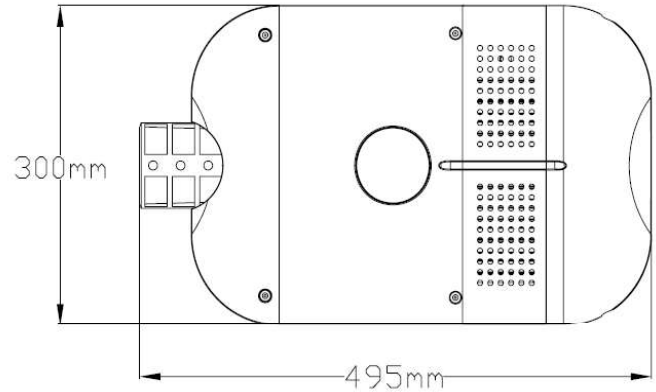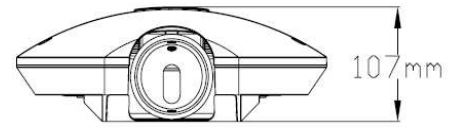


Optional converters for different applications




60mm to wall mount converter




2 in 1 converter




4 in 1 converter




Round to square converter



80-60mm converter



wall mount converter



60-40mm converter