

## QUICK FACTS

|                  |                             |
|------------------|-----------------------------|
| Input power      | <b>20W/30W</b>              |
| Power Factor     | <b>≥ 0.9</b>                |
| IP Rating        | <b>44</b>                   |
| Dimming          | <b>TRIAC</b>                |
| Lumen output 20W | <b>2091lm/2245lm/2216lm</b> |
| 30W              | <b>3040lm/3127lm/3048lm</b> |
| CCT              | <b>3000K/4000K/5000K</b>    |
| CRI              | <b>&gt;80</b>               |
| Beam Angle       | <b>100°</b>                 |
| Fascia Colour    | <b>White</b>                |
| Installation     | <b>Recessed</b>             |
| Warranty         | <b>5 years</b>              |


## PRODUCT SPECIFICATIONS

|                  |                             |
|------------------|-----------------------------|
| Supply Voltage   | <b>240-265V</b>             |
| Supply Frequency | <b>50-60Hz</b>              |
| Cable            | <b>1.2M Flex&amp;Plug</b>   |
| Body             | <b>Aluminium</b>            |
| Diffuser         | <b>PC</b>                   |
| Driver           | <b>Thermoplastic</b>        |
| Weight           | <b>G.W : 1.5kgs</b>         |
|                  | <b>N.W : 1.2kgs</b>         |
| Ambient Temp     | <b>-20°C - 65°C</b>         |
| Avg. lifetime    | <b>≥50,000 hrs@ ta 25°C</b> |


PHOTO



PHOTOMETRIC DIAGRAM

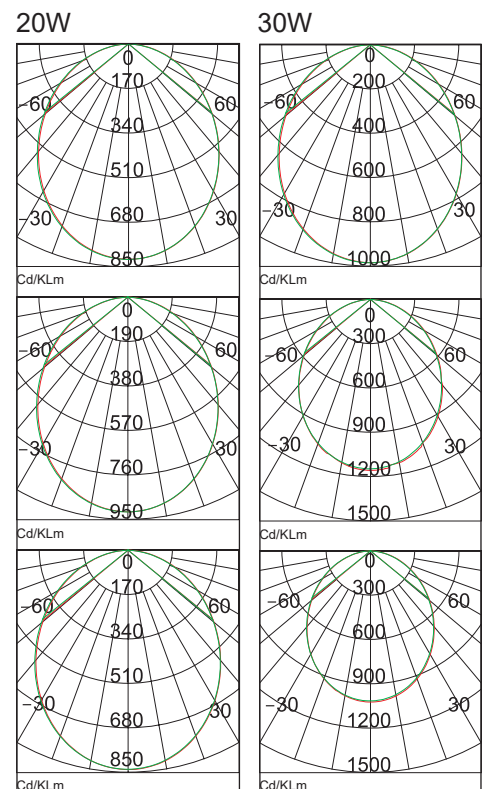

DIMENSIONS

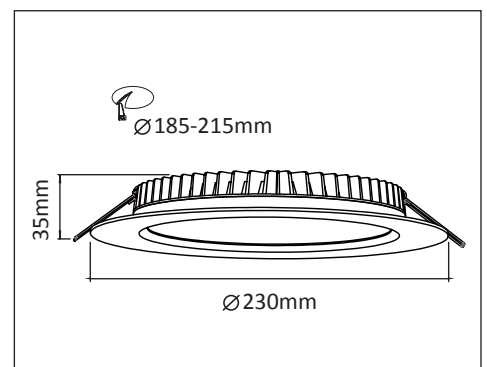

Subject to change without notice, errors and omission excepted. Always make sure to use the most recent release.