



RETRO 3000

LED RECESSED DOWNLIGHT



Features/Benefits

- Architecturally designed downlight
- Unique heatsink design with excellent thermal management
- Environmentally friendly, does not contain harmful substances
- Equipped with high luminaire efficacy SHARP COB LED chip
- Comes complete with TRIDONIC ATCO non dimmable LED driver with flex & plug
- Standard with 40° reflector, optional 20° & 60° reflectors available
- 50,000 hour lifespan
- IP44 rated
- 3 years warranty

Applications

- Restaurants
- Hotels
- Museums
- Exhibition Buildings
- Retail Stores
- Meeting Rooms


VBLDL-195-1-4K



Trim Colour



Dimensional Drawings



Cut Out: Ø150mm




Product Specifications

Product Codes	Power Consumption	Color Temperature	LED Current	Input Voltage	Luminaire Efficiency	Lumens Output	Beam Angle	CRI	Working temperature
VBLDL-195-1-3K	37W	3000K	900mA	220-250V/50hz	82lm/w	3000 lm	40°	>80	-20°C~50°C
VBLDL-195-1-4K	37W	4000K	900mA	220-250V/50hz	82lm/w	3000 lm	40°	>80	-20°C~50°C

Photometrics

VBLDL-195-1-4K

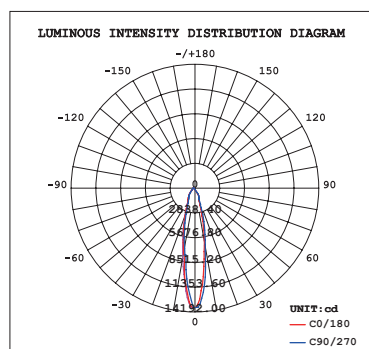

Height (m)	Illuminance (lx)	Diameter (mm)
1	7442	752
2	1861	1502
3	826.9	2267
4	465.2	3013
5	297.7	3768

Photometric information available upon request, please contact your sales representative.