


PURO 400

CL25W400R-MUL-SS

SAP CODE: 2000111

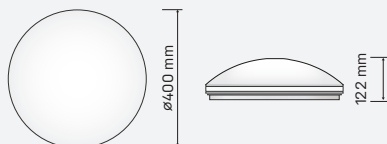


25W, indoor,
Intellisensor,
Tritone three colour
temperature, LED oyster

An indoor oyster light with 3
switchable colour temperatures
and Intellisensor for automatic
standby dimming.



Photometric
Diagram



Unit: cd

— C0/180 120.0deg
— C90/270 120.0deg

KEY INFORMATION

Lumen Output	1680 / 1840 / 1800lm
Input Power	25W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	67 / 74 / 72lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	14-42VDC
Power Factor	>0.9
LED Input Current (nominal)	600mA
Useful life @Ta25° (L70)	50,000hr



CONSTRUCTION

Housing	Steel
Optics	PMMA (acrylic)
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	0.8kg
Dimensions	Ø400x122mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2
Food Grade Approval	HACCP


Intellisensor

Combine daylight & high frequency motion detection in one unit to achieve on/off control

Detection range, hold time, standby time and daylight threshold can be preset.

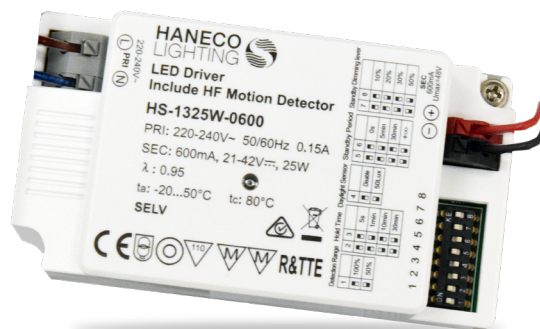

Wall Mount



Ceiling Mount

QUICK FACTS


- Motion activated constant current driver
- Standby power less than 0.5W
- 5.8Ghz microwave transmission power
- Detection range, hold time and brightness can be preset
- Microwave can penetrate non-metallic barriers such as plastic and glass materials

ELECTRICAL

Supply Voltage	220-240V
Supply Frequency	50-60Hz
Output Voltage	21-42V
Output Current	600mA
Standby Power	<0.5W
Detection Area	10m x 6m x H

DIP SWITCH SETTINGS

Detection Area	Hold Time	Daylight Sensor	Standby Period	Standby Dimming Level
1 on 100% 50%	2 3 on on 5s on 1min on 10min on 30min	4 on Disable 50Lux	5 6 on on 0s on 5min on 30min +∞	7 8 on on 10% on 20% on 30% 50%



- NOTE:**
1. 'Os' means on/off control.
 2. "+∞" means bi-level dimming control, fixture never switches off.
 3. Factory default setting: 100%, 1min, 50Lux, 5min, 100%