LUCIDO30W5K-V2

QUICK FACTS

Input power	**30W**
Power Factor	**≥0.9**
IP Rating	**65**
Dimming	**NO**
Lumen output	**2446lm**
CCT	**5000K**
CRI	**80**
Beam Angle	**120°**
Fascia Colour	**Silver**
Installation	**Stirrup Mount**
Warranty	**3 years**

PRODUCT SPECIFICATIONS

Supply Voltage	**240V**
Supply Frequency	**50-60Hz**
Cable	**1M Flex**
Body	**Aluminium**
Diffuser	**Tempered Glass**
Driver	**Integral**
Weight	**G.W : 0.90kgs**
	N.W : 0.80kgs
Ambient Temp	**-20°C - 40°C**
Avg. lifetime	**≥50,000 hrs@ ta 25°C**

PHOTO

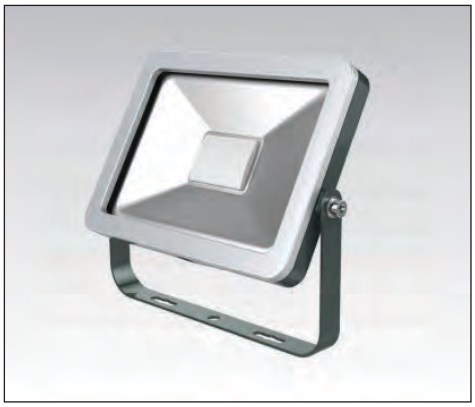

PHOTOMETRIC DIAGRAM

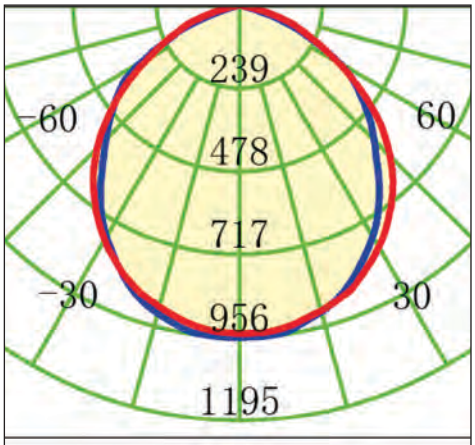

UNIT: cd

C0/180 deg

C90/270 deg

DIMENSIONS

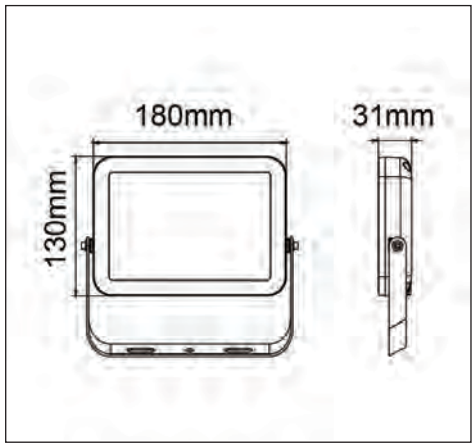

Subject to change without notice, errors and omission excepted. Always make sure to use the most recent release.

HANECO LIGHTING

www.haneco.com.au
Email: info@haneco.com.au

Last update
March 31, 2017 9:54 AM