

**Head Office**

40 Biloela Street
Villawood NSW 2163
T +612 9723 3099
F +612 9724 1899

Victoria

46-48 Keys Road
Moorabbin VIC 3189
T +613 9532 3168
F +613 9532 1838

Queensland

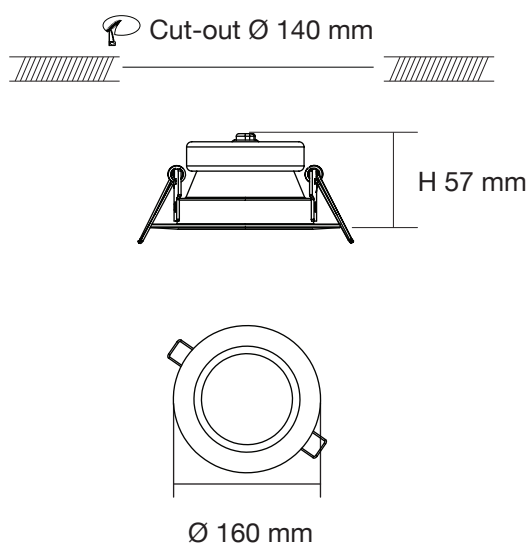
13/258 Musgrave Road
Coopers Plains QLD 4108
T +617 3276 8897
F +617 3277 8817

WA Agencies

Delta Lighting System
15 Hunt St. Malaga WA 6090
T +618 9249 4447
F +618 9249 2776



S9073 PREMIER

**IP64****DIMENSIONS****FEATURES**

- Premium grade aluminium body
- Powder coated finish
- Opal acrylic diffuser
- High efficiency SMD LED chips
- Trailing edge dimmable LED driver included
- 1.2 m flex & plug fitted
- IP64 weatherproof

- **COLOUR TEMPERATURE**
3000K WARM WHITE
6000K DAYLIGHT

- **FITTING COLOUR**
White
Anodized Silver

OPTION**DIMMING OPTIONS**

- 1-10V dimming
- Digital dimming (DSI, DALI)

TECHNICAL SPECIFICATIONS

Model No.	Input Voltage	Power	Luminous Flux	Beam Angle	Colour Temp	CRI (Ra)	Dimmable	Dimensions Ø x H	Cut Out Ø	Fitting Colour
S9073 WP WH	240V~50Hz	18W	1400lm	90°	3000K	>80	Yes	160 x 57 mm	140 mm	White
S9073 DP WH	240V~50Hz	18W	1550lm	90°	6000K	>80	Yes	160 x 57 mm	140 mm	White
S9073 WP SL	240V~50Hz	18W	1400lm	90°	3000K	>80	Yes	160 x 57 mm	140 mm	Anodized Silver
S9073 DP SL	240V~50Hz	18W	1550lm	90°	6000K	>80	Yes	160 x 57 mm	140 mm	Anodized Silver